

22,700 Litre
(5,000 Gallon)

Price: \$

45,400 Litre
(10,000 Gallon)

COMBO
2 x 22,700 L Tanks

Price: \$

32,700 Litre
(7,200 Gallon)

Price: \$

24,500 Litre
(5,400 Gallon)

Price: \$

49,000 Litre
(10,800 Gallon)

COMBO
2 x 24,500 Litre Tanks

Price: \$

5,000 Litre
(1,100 Gallon)

5,000 L Upright 5,000 L Squat
3,000 L

Price: \$

2,000 Litre Slim 2B
(440 Gallon)

Price: \$

3,000 Litre Slim 3B
(660 Gallon)

Price: \$

5,000 Litre Slim 5B
(1,140 Gallon)

Price: \$

Don't just fit a Tank, maximise your water catchment and enhance water quality.

Leaf Eater

Price: \$

Tank Screen Cover

Price: \$

Tank Gauge

Price: \$

First Flush Water Diverter

Price: \$

Tank Guardian Easy Clean

Price: \$

Recommended Site Preparation

Correct site preparation is essential to ensure a long and trouble-free life for your water tank.

It is essential to have your water tank on a **FLAT LEVEL COMPACTED BASE**. The base of your water tank must be fully supported at all times.

Concrete Slab must be at least 25 mpa and 100mm (4") thick with F62 mesh halfway through the mix. It should be screeded flat and level with no high or low spots. The finished surface should have a trowelled finish.

Crusher dust bases must be 300mm (12") wider than diameter of the water tank and prepared as follows:

1. Remove at least 100 mm (4") of natural earth, ensuring the base is flat and level.
2. Refill with at least 75 mm (3") of crusher dust thoroughly mixed with dry cement powder for a 4 m (13") base we suggest 2-3 bags of cement powder.
3. Once spread, thoroughly compact the crusher dust with suitable compacting equipment, not by any other means.
4. Thoroughly screed the surface and ensure the finished surface is perfectly FLAT AND LEVEL and free of stones, tree roots, etc. Do not water to set the cement powder, natural moisture will do this when your tank is in position.

Note: Sand is not acceptable.

INSPECT THE BASE REGULARLY checking for, and rectifying, any undermining by water run-off or animals burrowing such as toads, mice etc.

Molasses tanks must have a concrete slab or suitably constructed tank stand with flat level deck to be considered for warranty.

Molasses tanks must have a concrete slab or suitably constructed tank stand with flat level deck to be considered for warranty.

Warranty

ABOUT THIS WARRANTY

1. NATIONAL POLY INDUSTRIES PTY LTD ACN 107 251 267 trading as NATIONAL POLY INDUSTRIES ("National Poly Industries") warrants that, subject to the terms of this warranty, it will either, at its sole discretion, replace or repair any water tank affected by a defect or fault caused by poor workmanship for a period limited to:
 - 1.1 twenty (20) years from the date of purchase for all water tanks other than Li-LoTM Underground and Slimline water tanks;
 - 1.2 fifteen (15) years from the date of purchase for Li-LoTM underground water tanks; or
 - 1.3 ten (10) years from the date of purchase for Slimline water tanks.
2. A purchaser of a water tank (in this warranty referred to as "you") will only be entitled to make a claim under this warranty if the defect or fault first appears, and National Poly Industries is informed of the claim, within the duration of that warranty period and in accordance with paragraph 4 of this warranty.
3. This warranty does not apply to National Poly Industries industrial tanks. For warranties pertaining to National Poly Industries industrial tanks ask about our separate industrial tank warranties.

HOW TO MAKE A CLAIM

4. To make a warranty claim under this warranty, you must:
 - 4.1 notify National Poly Industries in writing at the address shown at the end of this warranty (noting that updates to that address may have been notified via the National Poly Industries website) within fourteen (14) days of the existence of any defect or fault becoming apparent and provide National Poly Industries with the opportunity to inspect the defective or faulty water tank within twenty-eight (28) days (or sooner if reasonably requested by National Poly Industries) of such notification; and
 - 4.2 send the original invoice evidencing the purchase of your water tank to National Poly Industries at the address shown at the end of this warranty.
5. You must bear all expenses of making a claim, whether valid or otherwise, under this warranty.

WHEN THIS WARRANTY DOES NOT APPLY

6. This warranty has no application in any of the following circumstances:
 - 6.1 the defect or fault is caused by you or any person (other than National Poly Industries) by using your water tank other than for its manufactured purpose;
 - 6.2 your water tank is damaged during relocation, including, but not limited to, installation and/or transportation;
 - 6.3 your water tank is not installed or maintained in accordance with National Poly Industries' Recommended Site Installation Sheet which is available at our website: www.nationalpolyindustries.com.au;
 - 6.4 the defect or fault is caused by an act of God, an act of war, storm, hail, tree roots (where the tank is installed too close to existing or subsequently planted trees), wind (where not securely anchored or weighted down by water immediately on delivery as per National Poly Industries' Recommended Site Installation Sheet) or other natural event or force of nature;
 - 6.5 the defect or fault is caused by reasonable weathering/degradation over time;
- 6.6 the defect or fault is caused by negligence (other than by National Poly Industries), abuse, wilful damage or other deliberate act;
- 6.7 the defect or fault is caused by someone walking on or applying any load to the top of the water tank;
- 6.8 the serial number or identification marked on your water tank is removed, defaced or altered;
- 6.9 the defect or fault is the result of inadequate or incorrect site preparation;
- 6.10 if your water tank is made out of polyethylene and it does not have a minimum of 300mm of flexible hose or a single sphere expansion joint fitted in line as close to the outlet fitting as possible;
- 6.11 pipe work which is connected to your water tank is not adequately supported so as to not to put undue pressure or strain on fittings;
- 6.12 the overflow capacity of your water tank is less than the inflow, causing excessive hydraulic pressure;
- 6.13 your water tank is transported with liquids in it;
- 6.14 if your water tank is a Li-LoTM Underground tank and it is:
 - (a) subjected to excessive traffic loads;
 - (b) not properly maintained by you;
 - (c) subjected to unauthorised modifications;
 - (d) installed:
 - (i) without you first having obtained both a structural survey of soil composition and a civil engineering report detailing any additional requirements as to the installation of the tank, in accordance with the requirements identified in the Li-LoTM Underground Tank Installation Manual which is available at our website: www.nationalpolyindustries.com.au ("Li-LoTM Manual"); or
 - (ii) without limiting the foregoing paragraph, otherwise than in accordance with the requirements set out in the Li-LoTM Manual;
- 6.15 regardless of the type of water tank:
 - (a) your water tank is not installed using the National Poly Industries' Recommended Site Installation Sheet. These are supplied when the tank is delivered are available at our website: www.nationalpolyindustries.com.au; or
 - (b) your water tank is placed on an unsound base or the base erodes and/or is not maintained by you or is subjected to unauthorised modifications;
- 6.16 the defect or fault is the result of after sale modifications, repairs or the installation of fittings which are not suitable for the water tank or weaken its integral properties; or
- 6.17 the defect or fault is caused by the storage of water at temperatures in excess of 40° Celsius.

WHO THIS WARRANTY BENEFITS

7. This warranty is provided to the original purchaser only and is not transferable.

For additional rights and limitations on claims, please visit:
<http://www.nationalpolyindustries.com.au/warranty-conditions/>

Fatigue Management Policy

National Poly Industries is committed to meeting our duty of care under the Chain of Responsibility and Compliance and Enforcement Legislation.

Activities that may contribute to a breach include, but is not limited to:

- Exerting pressure on drivers to overload or speed.
- Placing unrealistic delivery time frames on drivers
- Accepting overloaded trailers
- Accepting inadequate restrained loads
- Delays during loading and unloading.

With the support and co-operation of all parties we can ensure we all work towards improving safety while encouraging a culture of compliance and continuous improvement in the transport industry.

Head Office: **1800 651 004**
89 Childers Rd, Bundaberg Qld 4670
www.nationalpolyindustries.com.au

STRONG, AFFORDABLE, UV-RESISTANT RAINWATER TANKS

[nationalpolyindustries](https://www.facebook.com/nationalpolyindustries)

Collectively the **NPI GROUP**
deliver tanks to most of Australia

CLARK TANKS
TANKS BY DESIGN


TANKS DIRECT

TEAM POLY
Water Solutions For Life

CLARK INDUSTRIAL
Tanks

POLYCRAFT

AUSTRALIAN water SYSTEMS

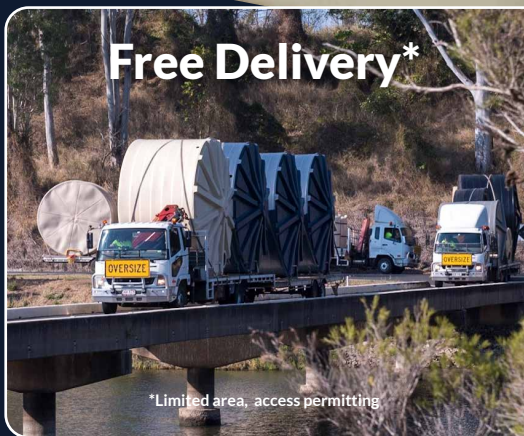

FAST FREE DELIVERY* (limited area, access permitting)
*Conditions apply, subject to change.

You Can't Buy Better than the Best



Why buy from National Poly Industries?

- ✓ One piece tank construction (with no vertical side seams).
- ✓ A 20 year warranty on all round tanks, 15 year warranty on Underground and 10 year warranty on Slimlines (Conditions Apply).
- ✓ 100% UV protection against the harsh Australian conditions.
- ✓ Tanks are made of 100% food grade material (Australian Standard AS2070/AS4020).
- ✓ All tanks are manufactured to comply with the Australian Tank Standard AS/NZ 4766:2006.
- ✓ We offer you friendly, personal and dependable service.
- ✓ Competitive rainwater tank and accessory prices.
- ✓ A vast network of agents with experienced personal who can help you choose the right tank for your needs.
- ✓ Pumps available at competitive prices.



Round Rainwater Tanks

Thicker walls at base for greater strength

- ✓ Designed to withstand harsh Australian conditions
- ✓ Weight guaranteed
- ✓ No vertical side seams

FAST FREE DELIVERY*

*Limited area, access permitting

<p>37,200 Litre (8,200 Gallon)</p> <p>Inlet height: 2.52 m (8'4")</p> <p>Overall height: 3.05 m (10')</p> <p>Weight: 700 kg</p> <p>Diameter at base: 4.33 m (14'3")</p> <p>Price: \$</p>	<p>32,700 Litre (7,200 Gallon)</p> <p>Inlet height: 2.25 m (7'5")</p> <p>Overall height: 2.75 m (9'0")</p> <p>Weight: 600 kg</p> <p>Diameter at base: 4.33 m (14'3")</p> <p>Price: \$</p>	<p>24,500L (5,400 Gallon) Squat</p> <p>Inlet height: 2.36 m (7'10")</p> <p>Overall height: 2.70 m (8'11")</p> <p>Weight: 425 kg</p> <p>Diameter at base: 3.80 m (12'6")</p> <p>Price: \$</p>	<p>22,700 Litre (5,000 Gallon) Super Squat</p> <p>Inlet height: 2.09 m (6'10")</p> <p>Overall height: 2.47 m (8'2")</p> <p>Weight: 400 kg</p> <p>Diameter at base: 3.86 m (12'8")</p> <p>Price: \$</p>	<p>14,500 Litre (3,200 Gallon)</p> <p>Inlet height: 2.09 m (6'10")</p> <p>Overall height: 2.40 m (8'0")</p> <p>Weight: 275 kg</p> <p>Diameter at base: 3.09 m (10'2")</p> <p>Price: \$</p>	<p>10,000 Litre (2,200 Gallon) Squat</p> <p>Inlet height: 1.40 m (4'7")</p> <p>Overall height: 1.75 m (5'8")</p> <p>Weight: 200 kg</p> <p>Diameter at base: 3.09 m (10'2")</p> <p>Price: \$</p>
<p>10,000 Litre (2,200 Gallon) Upright</p> <p>Inlet height: 2.20 m (8'2")</p> <p>Overall height: 2.52 m (8'4")</p> <p>Weight: 200 kg</p> <p>Diameter at base: 2.52 m (8'4")</p> <p>Price: \$</p>	<p>8,600 Litre (1,900 Gallon)</p> <p>Inlet height: 2.60 m (8'6")</p> <p>Overall height: 2.72 m (8'11")</p> <p>Weight: 175 kg</p> <p>Diameter at base: 2.08 m (6'10")</p> <p>Price: \$</p>	<p>7,200 Litre (1,600 Gallon)</p> <p>Inlet height: 2.18 m (7'2")</p> <p>Overall height: 2.32 m (7'7")</p> <p>Weight: 150 kg</p> <p>Diameter at base: 2.17 m (7'1")</p> <p>Price: \$</p>	<p>5,500 Litre (1,200 Gallon)</p> <p>Inlet height: 1.88 m (6'2")</p> <p>Overall height: 1.98 m (6'6")</p> <p>Weight: 125 kg</p> <p>Diameter at base: 2.08 m (6'10")</p> <p>Price: \$</p>	<p>5,000 Litre (1,100 Gallon)</p> <p>Inlet height: 1.63 m (5'4")</p> <p>Overall height: 1.70 m (5'7")</p> <p>Weight: 100 kg</p> <p>Diameter at base: 2.08 m (6'10")</p> <p>Price: \$</p>	<p>5,000 Litre (1,100 Gallon) Upright</p> <p>Inlet height 1.92 m (6'5")</p> <p>Overall height: 2.00 m (6'6")</p> <p>Weight: 100 kg</p> <p>Diameter at base 1.86 m (6'1")</p> <p>Price: \$</p>
<p>3,000 Litre (660 Gallon)</p> <p>Inlet height: 2.02 m (6'7")</p> <p>Overall height: 2.10 m (6'10")</p> <p>Weight: 75 kg</p> <p>Diameter at base: 1.45 m (4'9")</p> <p>Price: \$</p>	<p>1,800 Litre (400 Gallon)</p> <p>Inlet height: 1.48 m (4'10")</p> <p>Overall height: 1.50 m (4'11")</p> <p>Weight - 50 kg</p> <p>Diameter at base: 1.38 m (4'7")</p> <p>Price: \$</p>	<p>1,500 Litre (330 Gallon)</p> <p>Inlet height: 1.94 m (6'5")</p> <p>Overall height: 2.03 m (6'9")</p> <p>Weight: 40 kg</p> <p>Diameter at base: 1.04 m (3'5")</p> <p>Price: \$</p>	<p>1,000 Litre (220 Gallon)</p> <p>Inlet height: 1.48 m (4'10")</p> <p>Overall height: 1.54 m (5'1")</p> <p>Weight: 31 kg</p> <p>Diameter at base: 1.00 m (3'3")</p> <p>Price: \$</p>	<p>1,000 Litre (220 Gallon)</p> <p>Inlet height: 1.90 m (6'3")</p> <p>Overall height: 1.90 m (6'3")</p> <p>Weight: 40 kg</p> <p>Diameter at base: 0.87 m (2'11")</p> <p>Price: \$</p>	

Get the tank that fits - Slimline Under Eave Tanks

10 Year Warranty

5,000 Litre 5B (1,100 Gallon)

Width: 1.10 m, Length: 2.98 m

Height: 2.095 m, Weight: 200 kg

Price: \$

3,000 Litre 3B (660 Gallon)

Width: 0.85 m, Length: 2.53 m

Height: 2.00 m, Weight: 110 kg

Price: \$

2,000 Litre 2B (440 Gallon)

Width: 0.68 m, Length: 2.18 m

Height: 1.70 m, Weight: 100 kg

Price: \$

Brass Ball Valve of 1 1/4" Standard

Brass Outlet of 1 1/4" Standard

Stainless Steel Meshed Strainer

Stainless Steel Meshed Overflow

Multi-Purpose Troughs

Heavy, suitable for molasses, liquid feed, food and water.

590 Litre (130 Gallon)

Width: 1.10 m, Height: 0.66 m, Weight: 20 kgs

1,170 Litre (260 Gallon)

Width: 1.58 m, Height: 0.60 m, Weight: 37 kgs

Pump Covers

Length: 640 mm Width: 340 mm

Height: 600 mm Weight: 4 kgs

Smooth Cream

Desert Haze

Wheat

Beige

Merino

Light Grey

Slate Grey

Mountain Blue

Black

Mist Green

Heritage Green

Rivergum

Stormedge Blue

Heritage Red

More Colours Available

Sizes shown are approximate sizes. Capacities listed are approximate maximum volumes. Prices quoted include GST. Specifications are subject to change. *Conditions Apply. **Product certification applies to selected range.